



**TLED Batten**  
**BN011 C**  
**Product Information**



# Essential TLED Batten: BN011C



**Application:** Retail, Home, Factory, Warehouse

## *Unique selling point*

- Available in Both Single and Double ended versions
- Power supply for Single ended TLED battens as well
- Different form Factors with Reflectors
- Strong and sturdy

# Essential TLED Batten: BN011C


## Specifications

Length (m)	L600,LI200
Voltage	220-240V~ 50/60Hz
IP rating	IP20
Wiring	Single and Double ended. Refer wiring diagrams
Insulation	Class I
Working temp	-20 ~ 40°C. (For Housing)
Connection	Inside wiring ; Middle entry;
Installation	Surface mounted, suspension
Housing material	SPCC
Housing coating	Powder painting, RAL9003
Housing thickness	0.3mm±0.02
Fuse	1000mA, with VDE
Accessory	Two screws: ST4x20mm ; two expansion bolts: 25xφ5.5mm *2
Packaging	PE Bag for each Batten, 40 Pcs in one Outercarton. One MI in each outercarton
Approbation	Compliant with IEC 60598

# Essential TLED Batten: BN011C

## Wiring

Single Ended

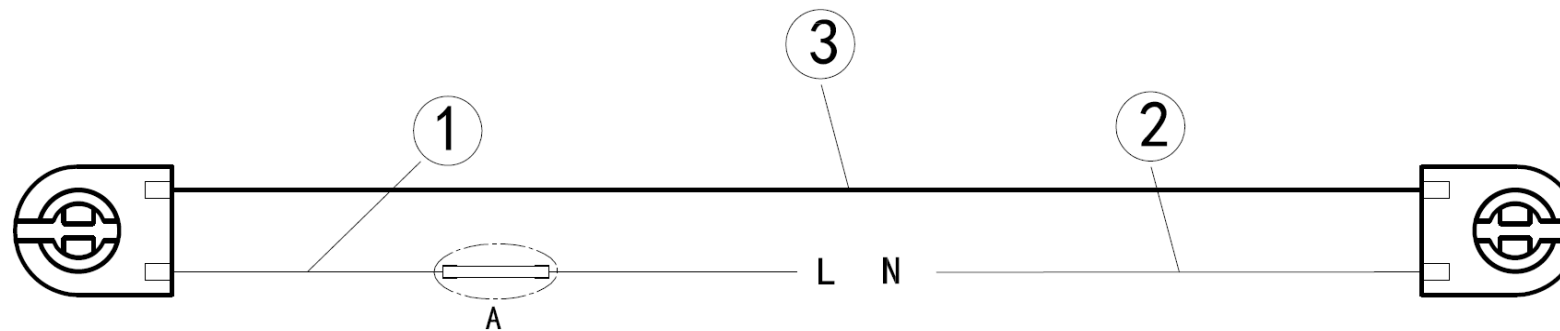

BN011C GM 接线图					
型号	序号	总长m	左剥线长度mm	右剥线长度mm	颜色
BN011C 1×L600 GM	1	0.25	8	8	红
	2	0.45	8	8	白
	3	0.65	8	8	白
BN011C 1×L1200 GM	1	0.25	8	8	红
	2	1.05	8	8	白
	3	1.25	8	8	白

# Essential TLED Batten: BN011C

## Form Factors



1XTLED  
L1200  
L600



2XTLED  
L1200  
L600



1XTLED  
2R  
L1200




2XTLED  
2R  
L1200



1XTLED  
1R  
L1200



# Essential TLED Batten: BN011C

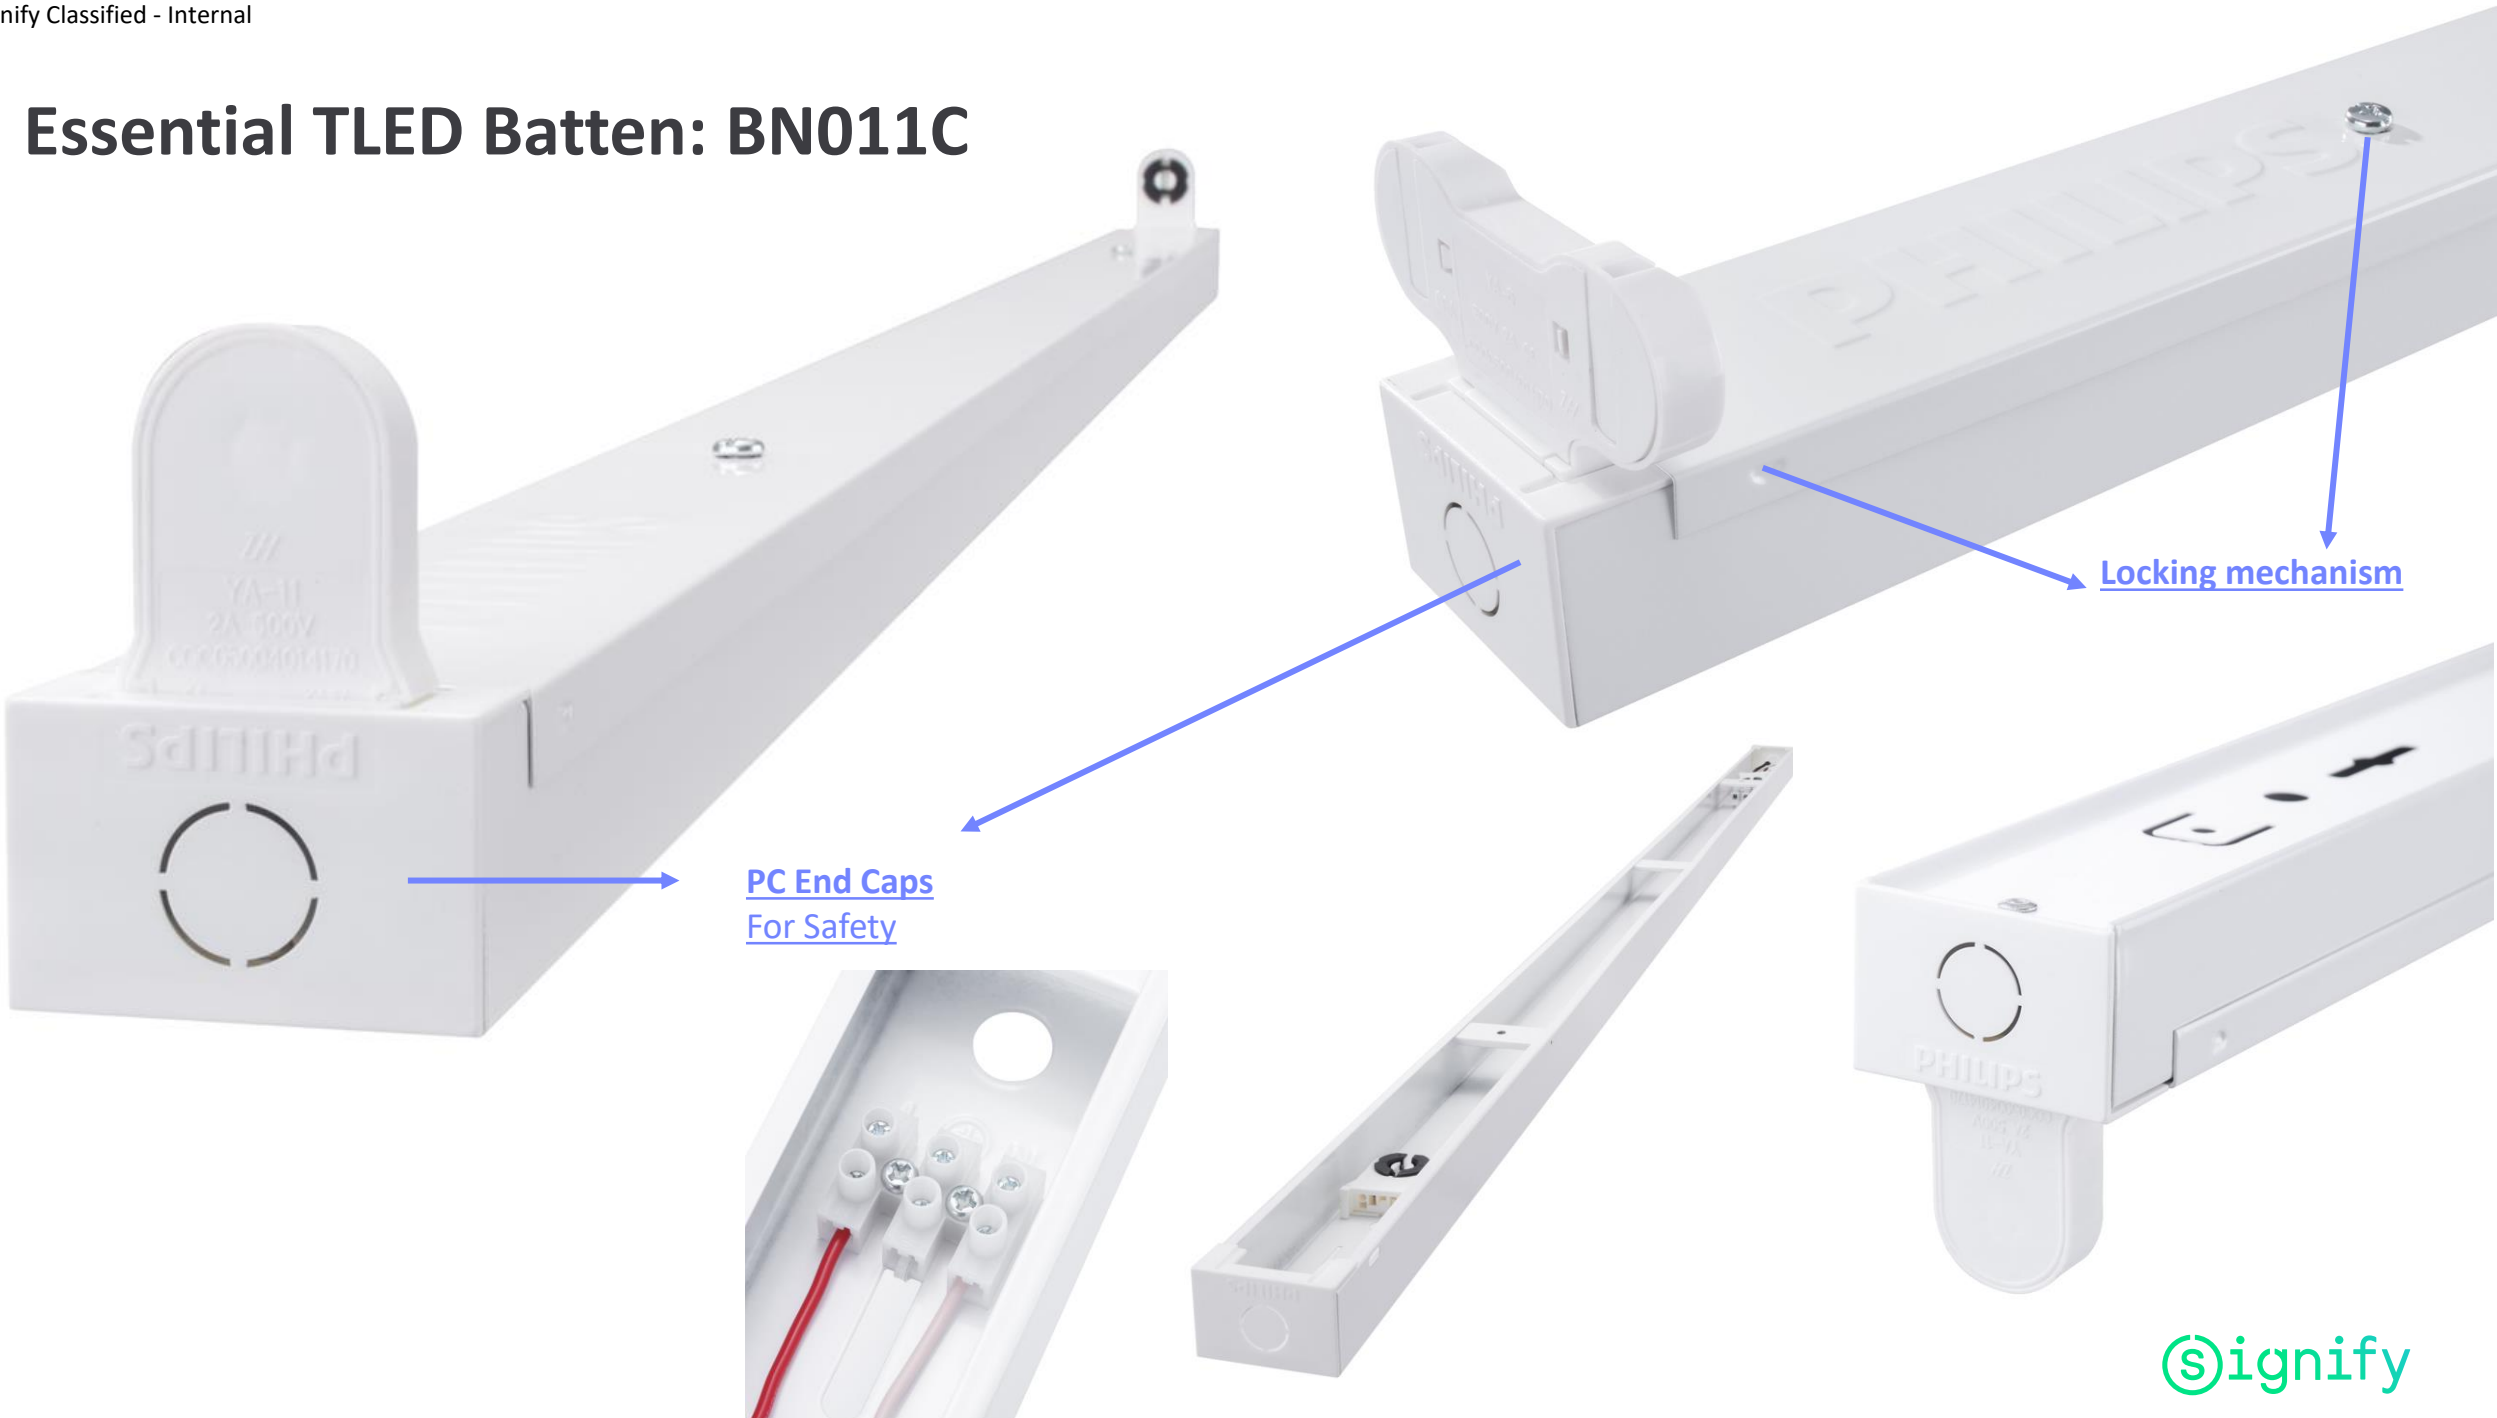

# Essential TLED Batten: BN011C

## Dimensions



BN011C 1×TLED

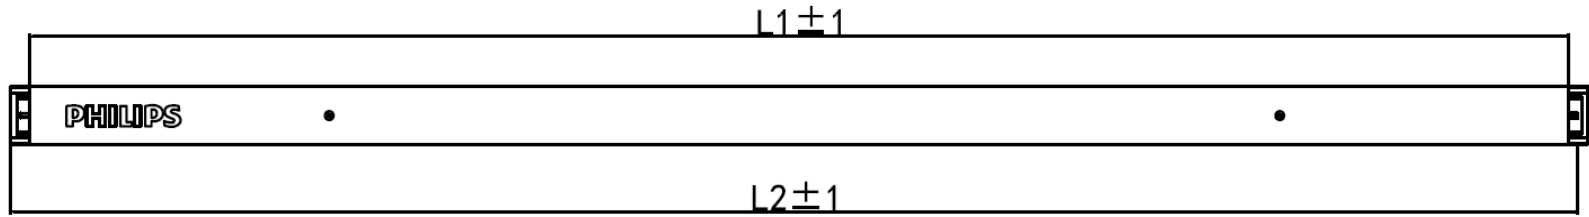

	L1	L2	W	H
L600	590	620	47	63
L1200	1200	1230	47	63

Data in mm

BN011C 2×TLED

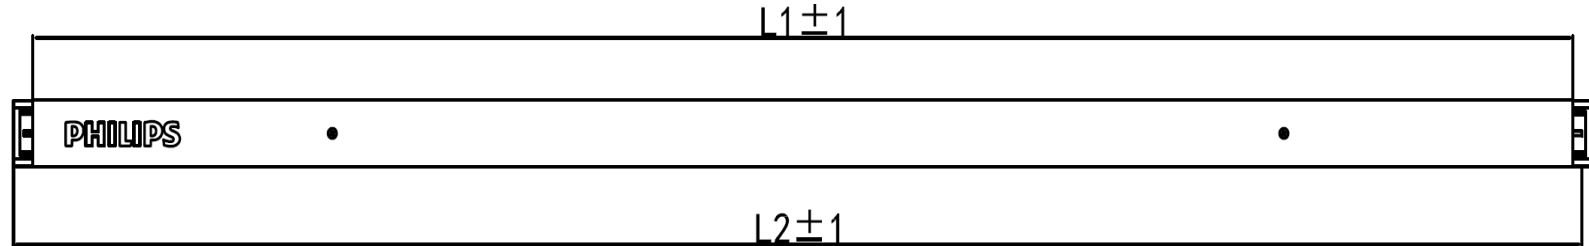

	L1	L2	W	H
L600	590	620	72	59
L1200	1200	1230	72	59

Data in mm

# Essential TLED Batten: BN011C

## 12NCs

12NC	Material Description
911401817082	BN011C 1xTLED L1200 G2 GM
911401816982	BN011C 1xTLED L600 G2 GM
911401817282	BN011C 2xTLED L1200 G2 GM
911401817182	BN011C 2xTLED L600 G2 GM
911401817582	BN011C 2xTLED L1200 2R G2 GM
911401817482	BN011C 1xTLED L1200 1R G2 GM
911401817382	BN011C 1xTLED L1200 2R G2 GM



Signify